




# 1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

**BEST SUITED FOR APPLICATIONS REQUIRING CONTROL OF A SINGLE DOOR OR GATE AND IN APPLICATIONS WHERE CARD READERS OR OTHER EXPANSION OPTIONS ARE NOT REQUIRED**

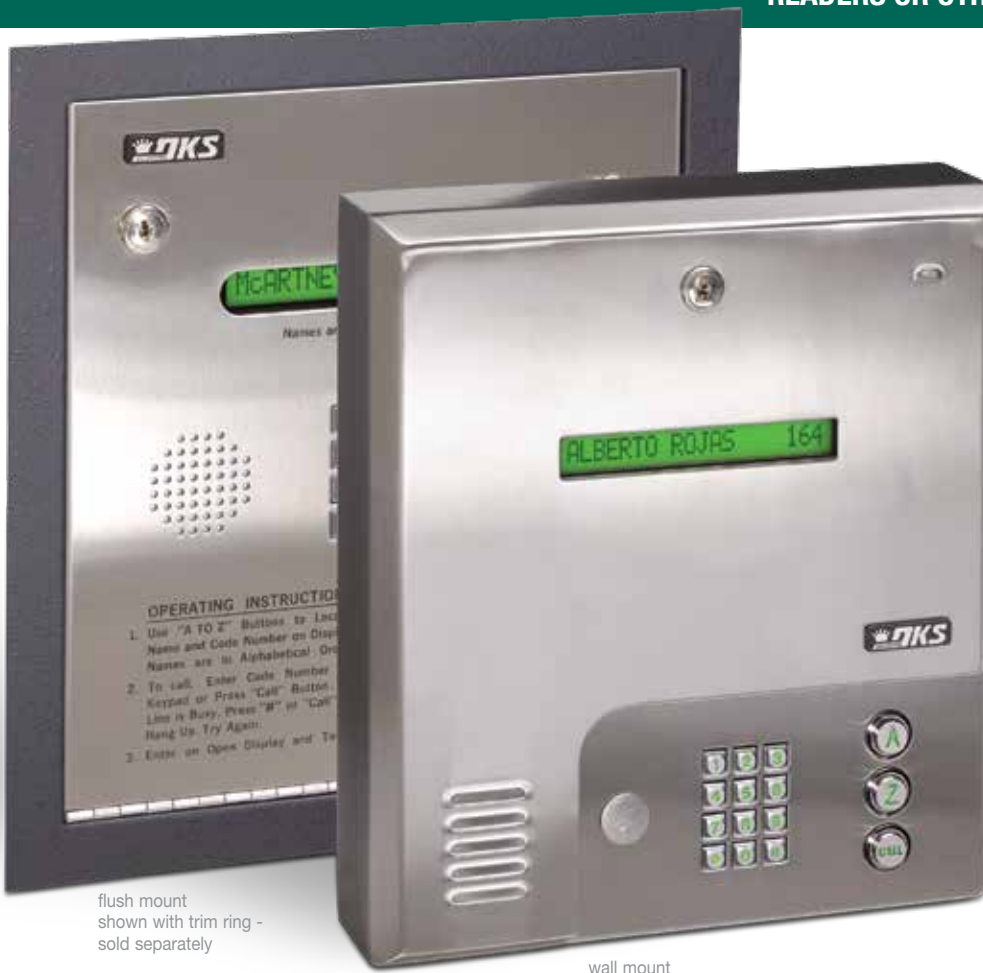

flush mount  
shown with trim ring -  
sold separately

wall mount

- Provides both resident and visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, Ethernet, or copper POTS lines
- 2 year limited factory warranty



**stainless steel**  
plate and anti-vandal features  
protects all internal parts



**internal LED**  
lit keypad and A-Z-CALL buttons




**pc programmable**  
easy to use software included



**voice and remote programming**  
use DKS service options for connection and programming

# 1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

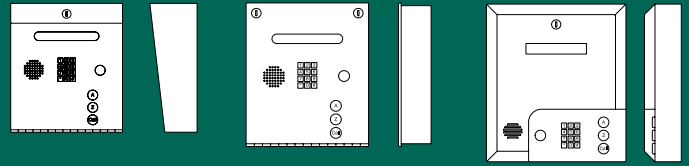

**1834 Surface**  
11.25" W x 13" H x 4.75" D  
(285mm W x 330mm H x 120.6mm D)

**1834 Flush**  
12" W x 13.25" H x 3.25" D  
(305mm W x 336.5mm H x 82.5mm D)

**1834 Wall**  
13.25" W x 15" H x 3.5" D  
(336.5mm W x 381mm H x 88.9mm D)

1834	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	DOOR CONTROL	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING	OPTIONS	TRANSACTION BUFFER
<b>Surface Mount</b>	3000	1000 (4-digit)	0	2 Doors	Single Line LCD Display	No	PC with * Remote Account Manager Software		8000 Events
<b>Flush Mount</b>	3000	1000 (4-digit)	0	2 Doors	Single Line LCD Display	No	PC with * Remote Account Manager Software	Gold Plated Faceplate	8000 Events
<b>Wall Mount</b>	3000	1000 (4-digit)	0	2 Doors	Single Line LCD Display	No	PC with * Remote Account Manager Software		8000 Events

\* Software is included with the DKS system

## Technical Features

### Mechanical

Stainless steel faceplate  
Galvanized steel sub-plate  
Metal keypad, with Internally lit LED keypad and A-Z-CALL buttons  
Offset speaker holes for protection  
Hands free voice operation (Optional handset available on surface or flush mount only)  
Surface, Flush or Wall mounting styles  
Flush mount requires flush mounting kit  
Enclosures are rated NEMA 4x

### Connection Methods

Cellular (powered by AT&T 4G LTE)  
VoIP (select your own VoIP provider)  
POTS (Plain Old Telephone Service)

Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions

### Specifications

Single line 20 character super-twist LCD display  
1/2 inch characters  
16 VAC (2 power transformers included)  
Full Duplex voice communication  
Stores up to 3000 phone numbers, 255 area codes  
Transaction buffer stores last 8000 events  
Control 2 entry points  
Programmable directory codes (1 to 4 digits)  
10 & 11 digit dialing capability  
Four-digit entry codes  
Built-in clock / calendar  
Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

### Miscellaneous

Environmental: 10°F to 145°F (-12°C to 62°C)  
Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)  
ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only  
Camera Ready: Optional B&W or Color CCTV camera\*  
\*may require additional CCTV equipment  
Shipping weight approximately 15-20 Lbs (6.8-9 kg)



FCC (US) DUF6VT-12874-OT-T  
DOC (CAN) 1736 4528 A

AT&T, the AT&T logo and all other AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies



Access Control Solutions since 1948

MEMBER:



**DOORKING®, INC.**

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2017 All Rights Reserved. Product specifications may change without notice.  
Rev. 5/17

Distributed by: